




System TEPRO

TEPRO - Observation Windows - Press Fit

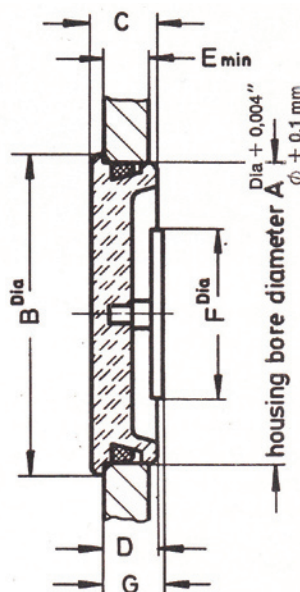

- With grip
- One-step fixation
- Self-locking
- No thread required
- Only thin machine walls required for fixation
- Up to 120° C
- From diameter 75 to 300 mm
- NBR (standard), Viton™ (or equivalent FKM seals) or silicon seals
- Pressure up to 0,6 bar

Size = Art. No.	D ₁ + 0,1	D ₂	L ₁	L ₂	L _{3 min}	D ₃	L ₄
75 B*	75	78	10	8,5	6	28	10
100 B*	100	103	10	8,5	6	28	10
150 B*	150	153	10	8,5	6	28	10
200 B*	200	203	10	8,5	6	—	—
250 B*	250	253	12	10	8	—	—
300 B*	300	303	15	12	10	—	—

*polycarbonate, for temperatures up to 120° C

For further enquiries or orders please contact us:

Teplast GmbH
Hauptstrasse 53
CH-5074 Eiken

Tel: +41 62 8712090
Fax: +41 62 8712190

Email: info@teplast.com
Web: www.teplast.com